


# Banner Specifications

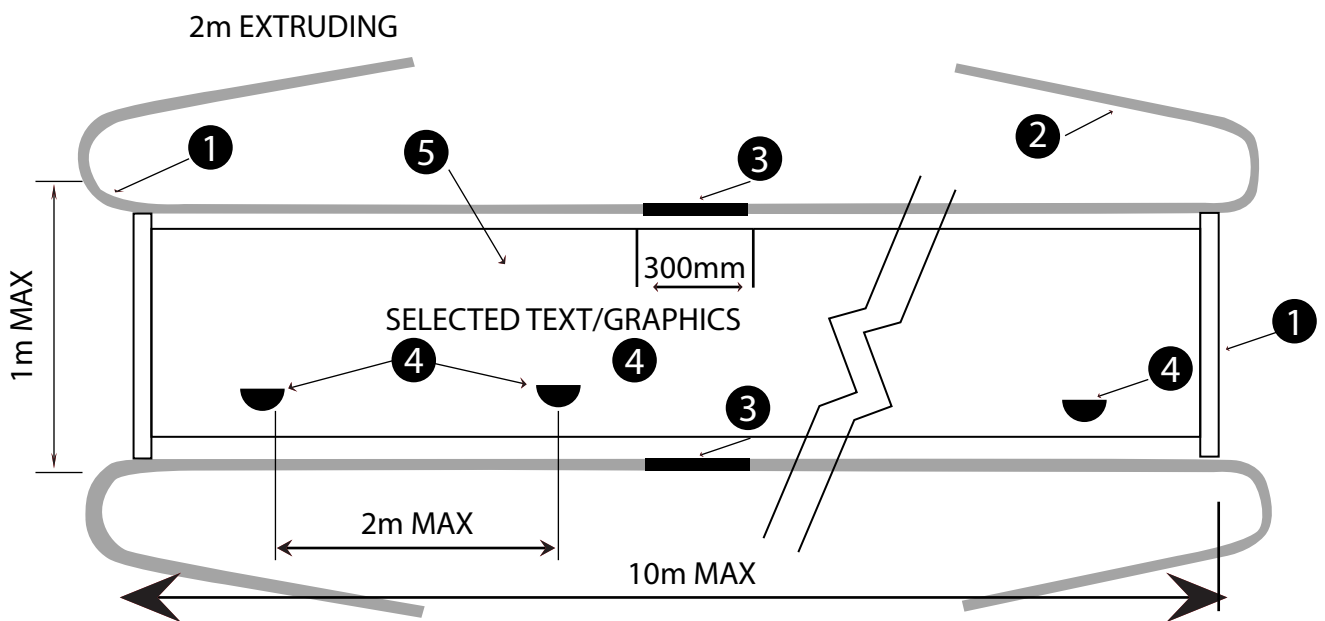

## COMPONENTS

1. REINFORCED CORNERS AND EDGES
2. 12MM MINIMUM DIAMETER ROPE WITH A MINIMUM OF 2 METERS EXTRUDING FROM THE ENDS OF THE BANNER
3. SEW ROPES INTO THE BANNER FOR 300MM LENGTH TOP AND BOTTOM AT CENTRE
4. WIND FLAPS 150MM IN DIAMETER CUT INTO THE MATERIAL EVERY 2 METERS
5. WOVEN VINYL OR LIGHT DUCT CANVAS